

MURAL CALYPSO

gerflor.com



Gerflor[®]
theflooringroup



COMPLIANT WITH LOCAL FIRE REGULATIONS

| Fire classification (EN 13501): **B-s2,d0.**



HEALTH PROTECTION

| Reach compliant.



REDUCES NOSOCOMIAL DISEASES

- | Smooth and washable surface
- | **> 99 % inhibits** growth of bacteria according to ISO 22196
- | Hot welding between 2 rolls



WIDE RANGE OF COLORS FOR ALL APPLICATIONS

- | Matches the flooring colour trends to offer a lot of combinations
- | **31 colors** references



NO WHITE LINE APPEARANCES AFTER WELDING

| **Coloured backing**



WATERPROOF SYSTEM

- | Available in weldable 2m-wide roll for a perfect water tightness
- | Overlapping the flooring



FAST AND EASY INSTALLATION

- | Horizontal or vertical installation
- | **Complete range of accessories** and tools
- | Same skills required as for resilient flooring
- | Until 60 times less joint vs. ceramics

7001 Bamboo haze pearl



MURAL CALYPSO
is the **hygienic, decorative**
and **long lasting** wallcovering
for all types of **wet rooms**
and **feature walls**.

More information on
www.gerflor.com

7001 Bamboo haze pearl

MURAL CALYPSO


Compact

Bs2d0



7728 Manhattan Stone




7001 Bamboo Haze Pearl



7001 Bamboo Haze Pearl



7740 Fabric Silk



7711 Ice



7736 Fabric Wool



7721 Manhattan Mist




7008 Fossil Ice






7004 Prism Haze Pearl

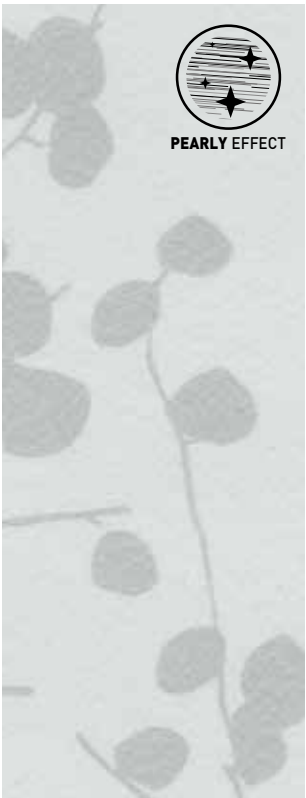

7006 Blossom Haze Pearl



7009 Fossil Haze



7715 Crystal



7010 Haze



7734 Manhattan Concrete



7004 Prism Haze Pearl



7003 Prism Ice



Bamboo Lotus

MURAL CALYPSO


Compact

Bs2d0



7000 Bamboo Snow Pearl



7005 Blossom Snow Pearl



7611 Snow



7002 Bamboo Lotus




7712 Shadow



7753 Nordic Zen



7744 Nordic Milk



7309 Lotus



7714 Frost




7311 Linen



7011 Lichen



7007 Blossom Lichen



7104 Melon



7408 Skyline




7414 Fabric Denim



7012 Breeze



7201 Moonlight

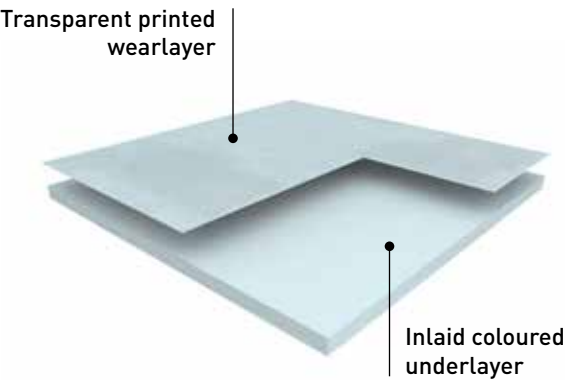

MURAL CALYPSO is a multilayered wall covering in 2m width roll and with a B-s2,d0 fire classification according to EN 13501. It is hot welded with CR41 welding rods for a perfect water tightness. It is made of a printed transparent wear layer and a coloured under layer for a better aspect of the welding. This layer comprises up to 30% of recycled products. It does not contain any CMR 1 & 2 component and is 100% compliant with REACH. It is 100% recyclable. This wall covering is specially recommended for wet room areas and makes the installation in angles easier thanks to its flexibility. The Shower System is compliant with most laws on “access for all” thanks to the installation in shower without tray.

MURAL CALYPSO			
DESCRIPTION			
Total thickness	EN ISO 24346	mm	0.92
Thickness of wearlayer	EN ISO 24340	mm	0.10
Weight	EN ISO 23997	g/m²	1610
Width of sheet	EN ISO 24341	cm	200
Length of sheet	EN ISO 24341	ml	30
CLASSIFICATION			
Product specification	-	-	EN 15102
Fire rating	EN 13501-1	class	Bs2,d0
PERFORMANCE			
Colour fastness	EN 20 105 - B02	degree	≥ 6
Chemical resistance	EN ISO 26987	class	OK
Anti-bacterial activity (E. coli - S. aureus - MRSA) ⁽¹⁾	ISO 22196	-	> 99 % inhibits growth
CE marking			
CE	EN 15102	-	OK
	EN 14041	-	-

[1] The implementation of an effective cleaning method is the best defence against infection.

MURAL CALYPSO: LESS SPEAKING FOR MORE ACTIONS

COMPOSITION
100% REACH compliant
FREE of formaldehyde
FREE of heavy metals
FREE of solvent

RECYCLED CONTENT
Up to 30% recycled content

RECYCLABILITY
100% recyclable product

INDOOR AIR QUALITY
TVOC emissions between 10 and 100 times better than norms requirements
Floorscore certified
No formaldehyde emission

LCA
- Eco-designed according to a product specific Life Cycle Analysis
- Product specific EPD (Environmental Products Declaration) available
- Manufactured in an Iso 14001 and Iso 50001 certified site
- Contribution to many Green Building Schemes (LEED, HQE, BREEAM...)

WELLNESS
Health: Antibacterial activity (inhibits growth > 99%)