


Zen



▲ SB: LZEN.0280 | 400 cm



▲ SB: LZEN.0820 | 400 cm




▲ SB: LZEN.0832 | 400 cm




▲ SB: LZEN.0812 | 400 cm




▲ SB: LZEN.0800 | 400 cm




▲ SB: LZEN.0871 | 400 cm



▲ SB: LZEN.0840 | 400 cm



▲ SB: LZEN.0862 | 400 cm




▲ SB: LZEN.0742 | 400 cm




▲ SB: LZEN.0762 | 400 cm




▲ SB: LZEN.0790 | 400 cm



▲ SB: LZEN.0872 | 400 cm




▲ SB: LZEN.0552 | 400 cm




▲ SB: LZEN.0830 | 400 cm




▲ SB: LZEN.0810 | 400 cm




▲ SB: LZEN.0774 | 400 cm



▲ SB: LZEN.0782 | 400 cm



▲ SB: LZEN.0434 | 400 cm




▲ SB: LZEN.0850 | 400 cm



▲ SB: LZEN.0511 | 400 cm




▲ SB: LZEN.0624 | 400 cm



▲ SB: LZEN.0734 | 400 cm



▲ SB: LZEN.0711 | 400 cm

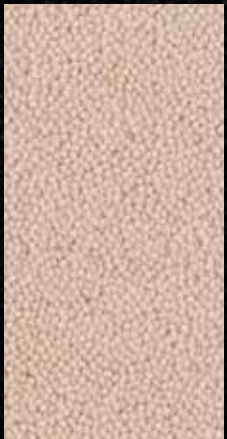


▲ SB: LZEN.0451 | 400 cm



▲ SB: LZEN.0164 | 400 cm



▲ SB: LZEN.0544 | 400 cm



▲ SB: LZEN.0301 | 400 cm



▲ SB: LZEN.0109 | 400 cm



▲ SB: LZEN.0124 | 400 cm



▲ SB: LZEN.0261 | 400 cm



▲ SB: LZEN.0271 | 400 cm



▲ SB: LZEN.0311 | 400 cm




▲ SB: LZEN.0141 | 400 cm



▲ SB: LZEN.0110 | 400 cm



▲ SB: LZEN.0054 | 400 cm



▲ SB: LZEN.0182 | 400 cm



▲ SB: LZEN.0423 | 400 cm



▲ SB: LZEN.0061 | 400 cm



▲ SB: LZEN.0204 | 400 cm



▲ SB: LZEN.0041 | 400 cm

X

A touch of luxury.

Zen

Secondary Backing	SB
Rugtype • Envers Rücken • Sottofondo • Reverso	
Manufacturing process	tufted, 1/10" saxony
Fabricagemethode • Technique de fabrication Herstellingsart • Tecnica di fabbricazione • Técnica de fabricación	
Pile composition	PA
Pool Samenstelling • Nature du velours Polmaterial • Composizione felpa • Composición de pelo	
Primary backing	non woven
Tuftdoek • Premier dossier Trägermaterial • Tela di supporto • Tela de soporte	
Width	± 400 cm
Breedte • Largeur Breite • Altezza • Ancho	
Effective pile height	± 6 mm
Nuttige poolhoogte • Hauteur de velours utile Tatsächliche Florhöhe • Spessore felpa utile • Altura de pelo	
Total height	± 8,5 mm
Totale dikte • Hauteur totale Gesamthöhe • Spessore totale • Altura total	
Number of knots/sqm	± 200.940
Aantal noppen/m ² • Nombre de points/m ² Noppenzahl/m ² • Numero di punti/mq • Puntos de pelo/m ²	
Pile weight/sqm	± 1.000 gr
Poolinzetgewicht/m ² • Poids mis en oeuvre/m ² Poleinsatzgewicht/m ² • Peso felpa/mq • Peso de pelo/m ²	
Total weight/sqm	± 2.160 gr
Totaal gewicht/m ² • Poids total/m ² Gesamtwicht/m ² • Peso totale/m ² • Peso total/m ²	
EN 13501-1 Fire behaviour	B_{fl}-s1
Brandgedrag • Comportement au feu Brennverhalten • Reazione al fuoco • Resistencia al fuego	
EN 1307-2004 Classification	Class 33 Commercial Heavy
Classificatie • Classification Klassifizierung • Classificazione • Clasificación al uso	
ISO 140/8 1997 Impact sound insulation	± 28 dB
Contactgeluidsisolatie • Isolation aux bruits d'impact Trittschallverbesserungsmaß • Miglioramento acustico	
ISO 354 Sound absorption α_s	± 0,3 (1000 Hz)
Geluidsdempingsvermogen α_s • Absorption phonique α_s Schallabsorptionsgrad α_s • Grado d'assorbimento acustico α_s	

ISO 11654 Sound absorption α_w	± 0,25
Geluidsdempingsvermogen α_w • Absorption phonique α_w Schallabsorptionsgrad α_w • Grado d'assorbimento acustico α_w	
DIN 52612 Thermal retention	± 0,112 m²/kW
Warmteoorlaatweerstand • Résistivité thermique Wärmedurchlaßwiderstand • Resistenza termica	
TOG rating	± 1,12
ISO 6356 2000 Teil 2: Permanently antistatic	< 2 kV
Permanent antistatisch • Antistatique permanent Permanent antistatisch • Antistatico permanente	
ISO 6356 2000 Teil 2: Surface resistance RoT	≤ 10⁹ Ω
Oppervlakteweerstand RoT • Résistance horizontale RoT Oberflächenwiderstand RoT • Resistenza in superficie RoT	
ISO 10965 1999 Teil 6: Vertical resistance RdT	≤ 10⁹ Ω
Doorgangswaerstand RdT • Résistance transversale RdT Durchgangswiderstand RdT • Resistenza ai passaggi RdT	
ISO 105 B02 2000 Lightfastness	≥ 5 - 6
Lichtechtheid • Solidité à la lumière Lichtechtheit • Solidità colori alla luce • Solidez del color a la luz	
ISO 105 E01 2002 Waterfastness change in colour	≥ 4
Waterrechtheid verkleuring • Solidité à l'eau changement couleur Wasserechtheit Änderung der Farbe • Solidità colori all'acqua cambio colore Solidez color al agua cambio de color	
ISO 105 E01 2002 Waterfastness staining	≥ 3 - 4
Waterrechtheid uitbloeding • Solidité à l'eau dégorgeement Wasserechtheit anbluten • Solidità colori all'acqua sfumatura colore Solidez color al agua pérdida de color	
ISO 105 X12 2001 Rubbingfastness dry	≥ 4
Wrijftechtheid droog • Solidité au frottement sec Reibungechtheit trocken • Solidità colori allo sfregamento a secco Solidez del color a la frotación en seco	
ISO 105 X12 2001 Rubbingfastness wet	≥ 4
Wrijftechtheid nat • Solidité au frottement humide Reibungechtheit nass • Solidità colori allo sfregamento umido Solidez del color a la frotación en húmedo	

(*) These details are approximate. Complete specification details and associated certificates together with tolerances applying to the above can be provided upon request. We reserve the right to improve technical specifications without prior notice. Due to method of manufacture perfect pattern and/or colour matching cannot be guaranteed. In cut-pile carpeting, in rare cases, shading pile reversal may occur without affecting its fitness for use. Shading/pile reversal can not be considered as a manufacturing or a material defect and will not affect the durability of the carpet. For other languages see: www.lano.com

